


CYNTEC CO., LTD.

乾坤科技股份有限公司

DELTA P/N: TLM104613F Series

Mechanical Dimensions & Schematic

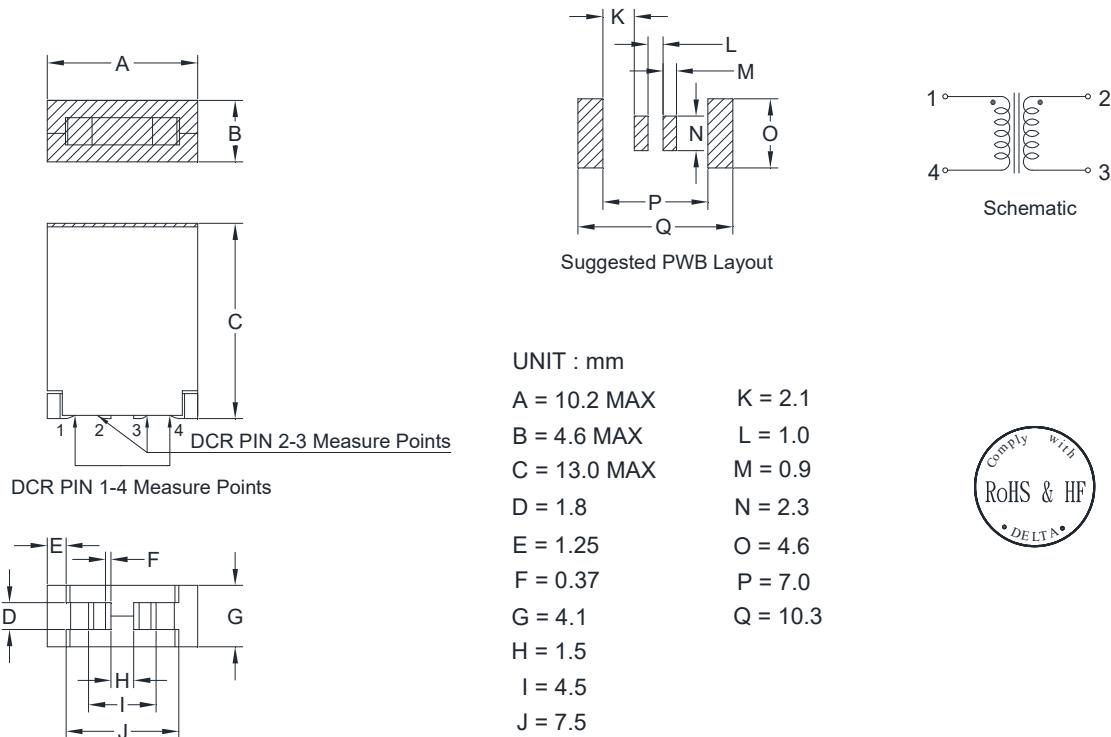

Electrical Characteristics @ 25°C, 100kHz, 1V

| Delta P/N | L (nH) ± 15% | Li (nH) MIN | DCR (mΩ) ± 10% | | Isat ¹ (A) | | | Ir ² (A) | |
|----------------|--------------------|-------------------|----------------------|------|--------------------------|-------|-------|------------------------|-----|
| | | | 1-4 | 2-3 | 25°C | 100°C | 125°C | 1-4 | 2-3 |
| TLM104613F-900 | 90 | 65 | 0.23 | 0.85 | 111 | 94 | 89 | 70 | 36 |
| TLM104613F-101 | 100 | 72 | | | 99 | 84 | 79 | | |
| TLM104613F-121 | 120 | 86 | | | 82 | 70 | 66 | | |
| TLM104613F-151 | 150 | 108 | | | 65 | 55 | 52 | | |

1. Isat is the DC current which causes the inductance drop to Li.
2. Ir is the DC current which causes the surface temperature of the part increase approximately 40 °C.
3. Operating temperature: -40°C to 125°C (Self-temperature rise included).